


SE6026GS-0

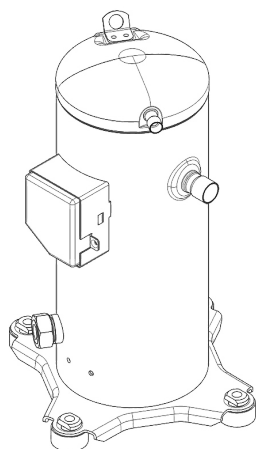

**ENGINEERING CODE**  
301G00101AC

**REFRIGERANT**  
R-404A

**POWER SUPPLY**  
380-420 V 50 Hz  
/ 460 V 60 Hz 3~

**APPLICATION**  
MBP

**MOTOR TYPE**  
3 Phase

**STANDARD**  
EN12900



**COOLING CAPACITY**  
6112 W

**EFFICIENCY**  
2.09 W/W

DATA

GENERAL DATA

|                        |                            |
|------------------------|----------------------------|
| Model                  | SE6026GS-0                 |
| Type                   | Hermetic Scroll Compressor |
| Technology             | On-Off                     |
| Compressor application | MBP                        |
| Compressor cooling     | Static                     |
| HP                     | 4                          |

ELECTRICAL DATA

|                    |           |
|--------------------|-----------|
| Voltage range 50Hz | 342-462 V |
|--------------------|-----------|

ELECTRICAL COMPONENTS

|                     |  |
|---------------------|--|
| Overload protection | Internal Protector   37HM544-XX or 3HPD-XX |
|---------------------|--|

## MECHANICAL DATA

|                              |  |
|------------------------------|--|
| Displacement                 | 10.10 m <sup>3</sup> /h (58.05 cm <sup>3</sup> /rev) |
| Free volume high             | 1 L  |
| Free volume low              | 3.6 L  |
| High side pressure           | 3.2 MPa  |
| Low side pressure            | 2 MPa  |
| Max discharge temperature    | 120 °C   |
| Oil charge                   | 1.4 L  |
| Oil Recharge                 | 1.25 L   |
| Oil Circulation              | 0.01 %   |
| Oil type                     | POE  |
| Pressure valve opening (max) | 3.1 MPa  |
| Pressure valve opening (min) | 2 MPa  |
| Height                       | 418 mm   |
| Weight                       | 31 Kg  |
| Rated speed                  | 2900 RPM   |

## EXTERNAL CHARACTERISTICS

|                       |             |
|-----------------------|-------------|
| Base Plate Holes      | 190.5x190.5 |
| Base plate dimensions | 239x239     |

| Connector | Internal diameter | Material                 | Shape       |
|-----------|-------------------|--------------------------|-------------|
| Suction   | Brazing           | Copper plated steel tube | ID 22.4 mm  |
| Discharge | Brazing           | Copper plated steel tube | ID 12.92 mm |

## MOTOR DATA

|                          |        |
|--------------------------|--------|
| Max motor temperature    | 130 °C |
| Motor insulation         | B      |
| Run winding resistance   | 2.4 Ω  |
| Start winding resistance | 2.4 Ω  |

## ADDITIONAL COMPONENTS

|                 |     |
|-----------------|-----|
| Cover           | yes |
| Cover gasket    | yes |
| Grommets        | yes |
| Grounding screw | yes |
| Hanger tab      | yes |
| Sightglass      | yes |
| Sleeves         | yes |

## PERFORMANCE

### TESTED CONDITIONS

|                        |         |
|------------------------|---------|
| Tested refrigerant     | R-404A  |
| Tested application     | MBP     |
| Tested standard        | EN12900 |
| Tested cooling         | Static  |
| Tested voltage         | 380 V   |
| Tested frequency       | 50Hz    |
| Tested frequency       | 50Hz    |
| Max refrigerant charge | 3.5 Kg  |

### RATED POINTS

| Condensing Temperature °C | Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Consumo de Potencia W |
|---------------------------|----------------------------|--------------------|----------------|-----------------------|
| 45                        | -10                        | 6112               | 2.09           | 2930                  |

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

### PERFORMANCE CURVE

Condensing Temperature 35°C

| Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Consumo de Potencia W |
|----------------------------|--------------------|----------------|-----------------------|
| -30                        | 3250.00            | 1.59           | 2040.00               |
| -25                        | 4037.00            | 1.88           | 2148.00               |
| -20                        | 4952.00            | 2.19           | 2259.00               |
| -15                        | 6022.00            | 2.54           | 2372.00               |
| -10                        | 7273.00            | 2.93           | 2485.00               |
| -5                         | 8733.00            | 3.36           | 2596.00               |
| 0                          | 10429.00           | 3.86           | 2705.00               |
| 5                          | 12387.00           | 4.41           | 2808.00               |
| 10                         | 14635.00           | 5.04           | 2906.00               |

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**

Condensing Temperature 45°C

| Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Consumo de Potencia W |
|----------------------------|--------------------|----------------|-----------------------|
| -30                        | 2800.00            | 1.16           | 2422.00               |
| -25                        | 3519.00            | 1.37           | 2559.00               |
| -20                        | 4327.00            | 1.61           | 2695.00               |
| -15                        | 5250.00            | 1.86           | 2829.00               |
| -10                        | 6317.00            | 2.13           | 2959.00               |
| -5                         | 7554.00            | 2.45           | 3083.00               |
| 0                          | 8988.00            | 2.81           | 3200.00               |
| 5                          | 10647.00           | 3.22           | 3309.00               |
| 10                         | 12556.00           | 3.68           | 3408.00               |

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.


**PERFORMANCE CURVE**

Condensing Temperature 55°C

| Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Consumo de Potencia W |
|----------------------------|--------------------|----------------|-----------------------|
| -20                        | 3579.00            | 1.11           | 3222.00               |
| -15                        | 4357.00            | 1.29           | 3382.00               |
| -10                        | 5239.00            | 1.48           | 3534.00               |
| -5                         | 6254.00            | 1.70           | 3676.00               |
| 0                          | 7426.00            | 1.95           | 3807.00               |
| 5                          | 8784.00            | 2.24           | 3926.00               |
| 10                         | 10355.00           | 2.57           | 4031.00               |

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**ENVELOPE**

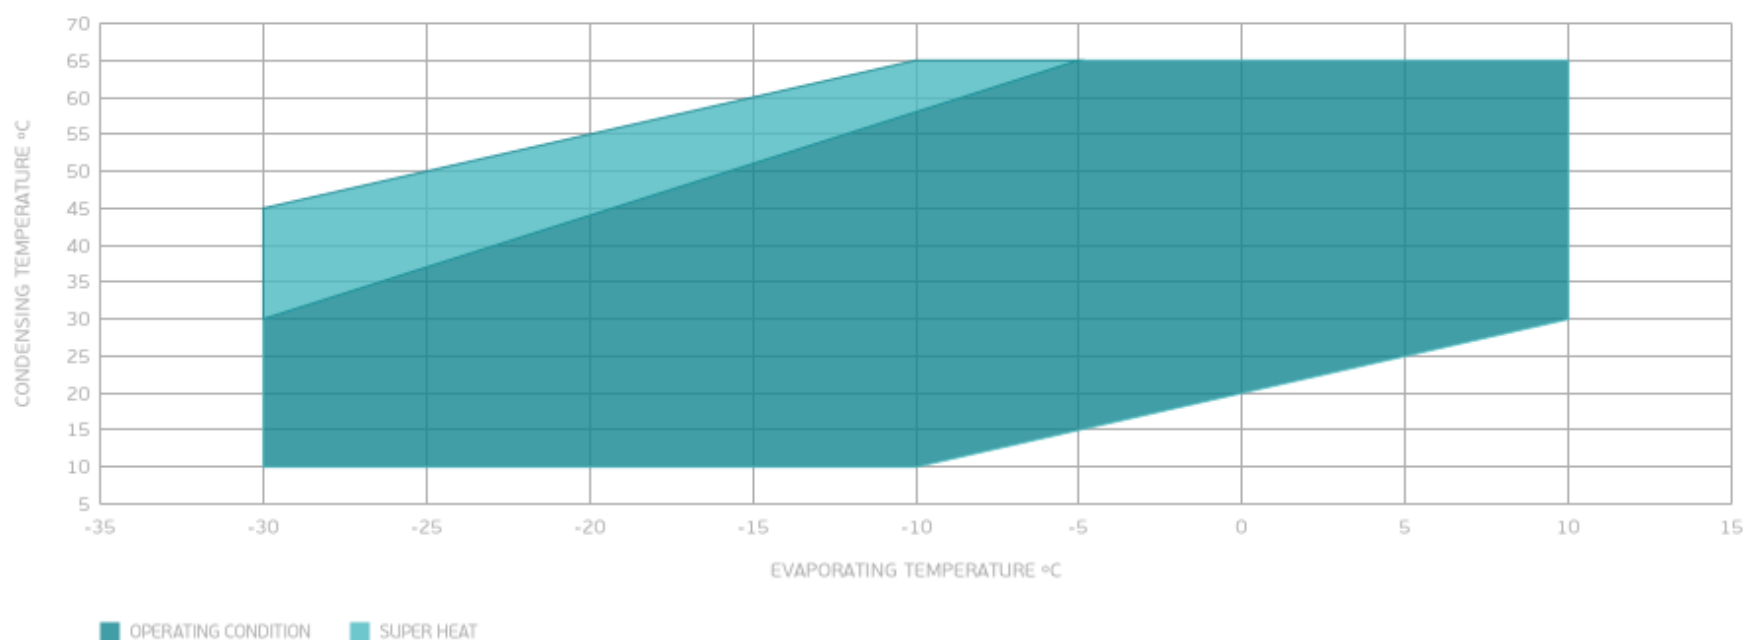

## EXTERNAL DIMENSIONS

