



Condensing unit  
Voltage Code : FZ

# SILAJ2446Z-FZ


Low Temp. Commercial (BP)

220 - 240V 1~ 50 Hz

R452A / R404A / R448A / R449A

SILAJ2446Z-FZ

Conditions	Frequency	Nominal Cooling Capacity		Sound Power ISO3745 / ISO 3743-1
		Watts	BTU/h	
Standard TE / R452A	50 Hz	1244	4242	57 dBA
Standard TE / R404A	50 Hz	1342	4576	57 dBA
Standard TE / R448A	50 Hz	1093	3726	57 dBA
Standard TE / R449A	50 Hz	1094	3730	57 dBA

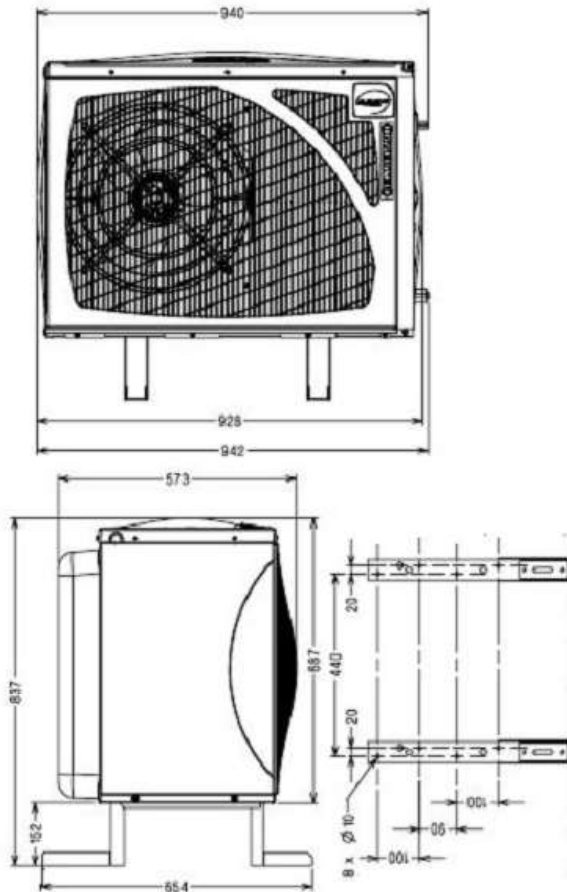

<b>Net Weight (Kg)</b>	72.0
<b>Expansion device</b>	Expansion_Valve
<b>Air Flow (m³/h)</b>	1650
<b>Compo Data Sheet</b>	124NT-FZ
<b>Elec Comp Type</b>	CSR
<b>Current (Amp)</b>	
Load Rated Amp	4.3
Max Cont Current	8.5
Lock Rotor Amp	30
<b>Fan</b>	
Speed (rpm)	546
Power (W)	65.0
Diameter (mm)	360
Protection	Overload
IP Level	IP44
<b>Condenser</b>	360/11500
<b>Liquid Receiver</b>	
Capacity (L)	1.5
Maximum Pressure (Bars)	32.0
<b>Suction Line</b>	
Suction Type	Tube / Tube
For Tubing Out Diam	12.7 (1/2")
Suction Connection Type	Brased
<b>Liquid Line</b>	
Liquid Line Type	Tube
For Tubing Out Diam	9.5 (3/8")
Liquid Connecton Type	Brased
<b>Connection Type</b>	TT
<b>Fan Guard</b>	maille < à 8mm

\* Standard TE : T°Ambient 32.0°C / T°Evap. -23.3°C / T°Return gas temp.. 32.0°C  
T°Subcooling. 2.0K

Note : Tecumseh reserves the right to change information contained in this document without notification.



**Tecumseh**

<b>SILAJ2446Z-FZ</b>	<b>Tension FZ : 220 - 240V 1~ 50 Hz</b>
----------------------	---

Les performances sont données dans les **conditions Standard TE** :  
 Condition Dew  
 The performance data are in **Standard TE conditions** :  
 Dew Condition

Gaz aspirés : 32.0 °C  
 Sous refroidissement : 2.0 K  
 Return gas : 32.0 °C  
 Subcooling : 2.0 K

© 2023 Tecumseh Products Company  
All rights reserved

**50 Hz R452A**

**N°5774**

5   T ambience	6   T évaporation	(°C)	<b>-40</b>	<b>-35</b>	<b>-30</b>	<b>-25</b>	<b>-20</b>	<b>-15</b>	<b>-10</b>
<b>25</b>	1   P frigorifique	(Watt)	554	759	1002	1288	1620	2001	2438
	2   P absorbée	(W)	546	627	712	803	900	1005	1117
	3   I absorbée	(A)	2.57	2.87	3.22	3.62	4.07	4.58	5.15
	4   Tc	(°C)	26.1	27.4	28.7	30.0	31.3	32.5	33.7
<b>32</b>	1   P frigorifique	(Watt)	478	667	889	1147	1446	1788	2178
	2   P absorbée	(W)	537	625	720	821	929	1046	1173
	3   I absorbée	(A)	2.52	2.86	3.26	3.71	4.21	4.76	5.37
	4   Tc	(°C)	31.7	33.2	34.7	36.2	37.6	39.0	40.4
<b>43</b>	1   P frigorifique	(Watt)	359	520	707	920	1164	1442	1759
	2   P absorbée	(W)	510	611	719	836	962	1098	1247
	3   I absorbée	(A)	2.43	2.84	3.31	3.83	4.40	5.03	5.71
	4   Tc	(°C)	40.7	42.5	44.3	46.0	47.7	49.3	51.0

**50 Hz R404A**

**N°824S-F**

5   T ambience	6   T évaporation	(°C)	<b>-40</b>	<b>-35</b>	<b>-30</b>	<b>-25</b>	<b>-20</b>	<b>-15</b>	<b>-10</b>
<b>25</b>	1   P frigorifique	(Watt)	619	839	1097	1396	1737	2123	2558
	2   P absorbée	(W)	593	669	754	847	949	1059	1177
	3   I absorbée	(A)	2.75	3.06	3.42	3.84	4.31	4.82	5.39
	4   Tc	(°C)	29.0	30.3	31.6	32.9	34.1	35.3	36.5
<b>32</b>	1   P frigorifique	(Watt)	538	740	974	1242	1547	1891	2276
	2   P absorbée	(W)	580	667	763	867	979	1099	1228
	3   I absorbée	(A)	2.71	3.07	3.48	3.94	4.45	5.02	5.63
	4   Tc	(°C)	34.6	36.0	37.5	38.9	40.3	41.6	43.0
<b>43</b>	1   P frigorifique	(Watt)	410	582	778	999	1246	1521	1828
	2   P absorbée	(W)	559	664	776	897	1026	1163	1309
	3   I absorbée	(A)	2.65	3.08	3.56	4.10	4.68	5.32	6.01
	4   Tc	(°C)	43.3	45.0	46.7	48.4	50.0	51.6	53.2

1 = cooling capacity 2 = power input 3 = current 4 = condensing temperature 5 = ambient temperature 6 = evaporating temperature

Nota : Tecumseh se réserve le droit de modifier les informations contenues dans ce document sans préavis.

Note : Tecumseh reserves the right to change information contained in this document without notification.



**Tecumseh**

<b>SILAJ2446Z-FZ</b>	<b>Tension FZ : 220 - 240V 1~ 50 Hz</b>
----------------------	---

Les performances sont données dans les <b>conditions Standard TE</b> :	Gaz aspirés :	32.0 °C
Condition Dew	Sous refroidissement :	2.0 K
The performance data are in <b>Standard TE conditions</b> :	Return gas :	32.0 °C
Dew Condition	Subcooling :	2.0 K

<b>50 Hz R448A (*)</b>								<b>N°6857</b>
5   T ambience	6   T évaporation	(°C)	<b>-30</b>	<b>-25</b>	<b>-20</b>	<b>-15</b>	<b>-10</b>	
<b>25</b>	1   P frigorifique	(Watt)	846	1123	1447	1824	2256	
	2   P absorbée	(W)	675	766	862	964	1072	
	3   I absorbée	(A)	3.05	3.45	3.90	4.39	4.93	
	4   Tc	(°C)	29.0	30.3	31.6	32.9	34.1	
<b>32</b>	1   P frigorifique	(Watt)	747	998	1291	1632	2023	
	2   P absorbée	(W)	684	785	891	1004	1126	
	3   I absorbée	(A)	3.10	3.55	4.04	4.57	5.15	
	4   Tc	(°C)	35.1	36.6	38.0	39.4	40.8	
<b>43</b>	1   P frigorifique	(Watt)	595	807	1054	1340	1670	
	2   P absorbée	(W)	687	803	926	1059	1202	
	3   I absorbée	(A)	3.17	3.69	4.25	4.85	5.51	
	4   Tc	(°C)	44.7	46.5	48.2	49.8	51.5	

<b>50 Hz R449A (*)</b>								<b>N°5333</b>
5   T ambience	6   T évaporation	(°C)	<b>-30</b>	<b>-25</b>	<b>-20</b>	<b>-15</b>	<b>-10</b>	
<b>25</b>	1   P frigorifique	(Watt)	847	1124	1449	1826	2259	
	2   P absorbée	(W)	675	766	862	964	1072	
	3   I absorbée	(A)	3.05	3.45	3.90	4.39	4.93	
	4   Tc	(°C)	29.1	30.4	31.6	32.9	34.1	
<b>32</b>	1   P frigorifique	(Watt)	748	999	1293	1634	2026	
	2   P absorbée	(W)	684	785	891	1004	1126	
	3   I absorbée	(A)	3.10	3.55	4.04	4.57	5.15	
	4   Tc	(°C)	35.1	36.6	38.0	39.4	40.8	
<b>43</b>	1   P frigorifique	(Watt)	596	808	1056	1342	1672	
	2   P absorbée	(W)	687	803	926	1059	1202	
	3   I absorbée	(A)	3.17	3.69	4.25	4.85	5.51	
	4   Tc	(°C)	44.7	46.4	48.1	49.8	51.4	

**1 = cooling capacity 2 = power input 3 = current 4 = condensing temperature 5 = ambient temperature 6 = evaporating temperature**

(\*) Veuillez vous référer strictement aux Recommandations d'Utilisation et Bulletins Marketing Tecumseh du fait de la température de reflux élevée pour les applications LBP.

(\*) Due to very high discharge temperature especially on LBP conditions, please strictly refer to Tecumseh Guidelines & Marketing Bulletin when using this refrigerant.

**Nota : Tecumseh se réserve le droit de modifier les informations contenues dans ce document sans préavis.**

**Note : Tecumseh reserves the right to change information contained in this document without notification.**

© 2023 Tecumseh Products Company  
All rights reserved