


SE6018GS-0



ENGINEERING CODE
301B00101AC

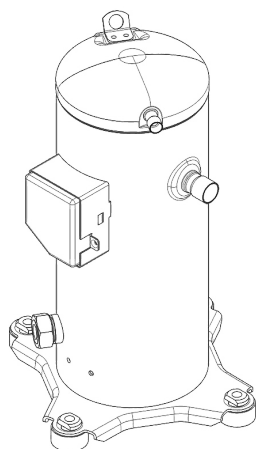

REFRIGERANT
R-134a



POWER SUPPLY
380-420 V 50 Hz
/ 460 V 60 Hz 3~



APPLICATION
MBP



MOTOR TYPE
3 Phase



STANDARD
EN12900



COOLING CAPACITY
2485 W



EFFICIENCY
2.01 W/W

DATA

GENERAL DATA

Model	SE6018GS-0
Type	Hermetic Scroll Compressor
Technology	On-Off
Compressor application	MBP
Compressor cooling	Static
HP	2 1/2

ELECTRICAL DATA

Voltage range 50Hz	342-462 V
--------------------	-----------

ELECTRICAL COMPONENTS

Overload protection	Internal Protector 37HM222-XX or 3HPD-XX
---------------------	--

MECHANICAL DATA

Displacement	7.30 m ³ /h (41.95 cm ³ /rev)
Free volume high	1 L
Free volume low	3.8 L
High side pressure	3.2 MPa
Low side pressure	2 MPa
Max discharge temperature	120 °C
Oil charge	1.4 L
Oil Recharge	1.25 L
Oil Circulation	0.01 %
Oil type	POE
Pressure valve opening (max)	3.1 MPa
Pressure valve opening (min)	2 MPa
Height	418 mm
Weight	30 Kg
Rated speed	2900 RPM

EXTERNAL CHARACTERISTICS

Base Plate Holes	190.5x190.5
Base plate dimensions	239x239

Connector	Internal diameter	Material	Shape
Suction	Brazing	Copper plated steel tube	ID 22.4 mm
Discharge	Brazing	Copper plated steel tube	ID 12.92 mm

MOTOR DATA

Max motor temperature	130 °C
Motor insulation	B
Run winding resistance	3.3 Ω
Start winding resistance	3.3 Ω

ADDITIONAL COMPONENTS

Cover	yes
Cover gasket	yes
Grommets	yes
Grounding screw	yes
Hanger tab	yes
Sightglass	yes
Sleeves	yes

PERFORMANCE

TESTED CONDITIONS

Tested refrigerant	R-134a
Tested application	MBP
Tested standard	EN12900
Tested cooling	Static
Tested voltage	380 V
Tested frequency	50Hz
Tested frequency	50Hz
Max refrigerant charge	3.5 Kg

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
45	-10	2485	2.01	1237

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-30	1198.00	1.28	936.00
-25	1401.00	1.46	959.00
-20	1735.00	1.74	995.00
-15	2194.00	2.11	1041.00
-10	2776.00	2.54	1093.00
-5	3474.00	3.03	1147.00
0	4285.00	3.57	1199.00
5	5203.00	4.18	1246.00
10	6226.00	4.85	1284.00

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-30	1044.00	0.98	1066.00
-25	1210.00	1.10	1098.00
-20	1503.00	1.31	1144.00
-15	1918.00	1.60	1200.00
-10	2452.00	1.94	1264.00
-5	3098.00	2.33	1330.00
0	3854.00	2.76	1396.00
5	4715.00	3.23	1458.00
10	5675.00	3.76	1511.00

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.


PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-20	1302.00	0.98	1331.00
-15	1650.00	1.18	1396.00
-10	2112.00	1.44	1469.00
-5	2685.00	1.74	1546.00
0	3363.00	2.07	1624.00
5	4142.00	2.44	1698.00
10	5017.00	2.84	1765.00

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

ENVELOPE

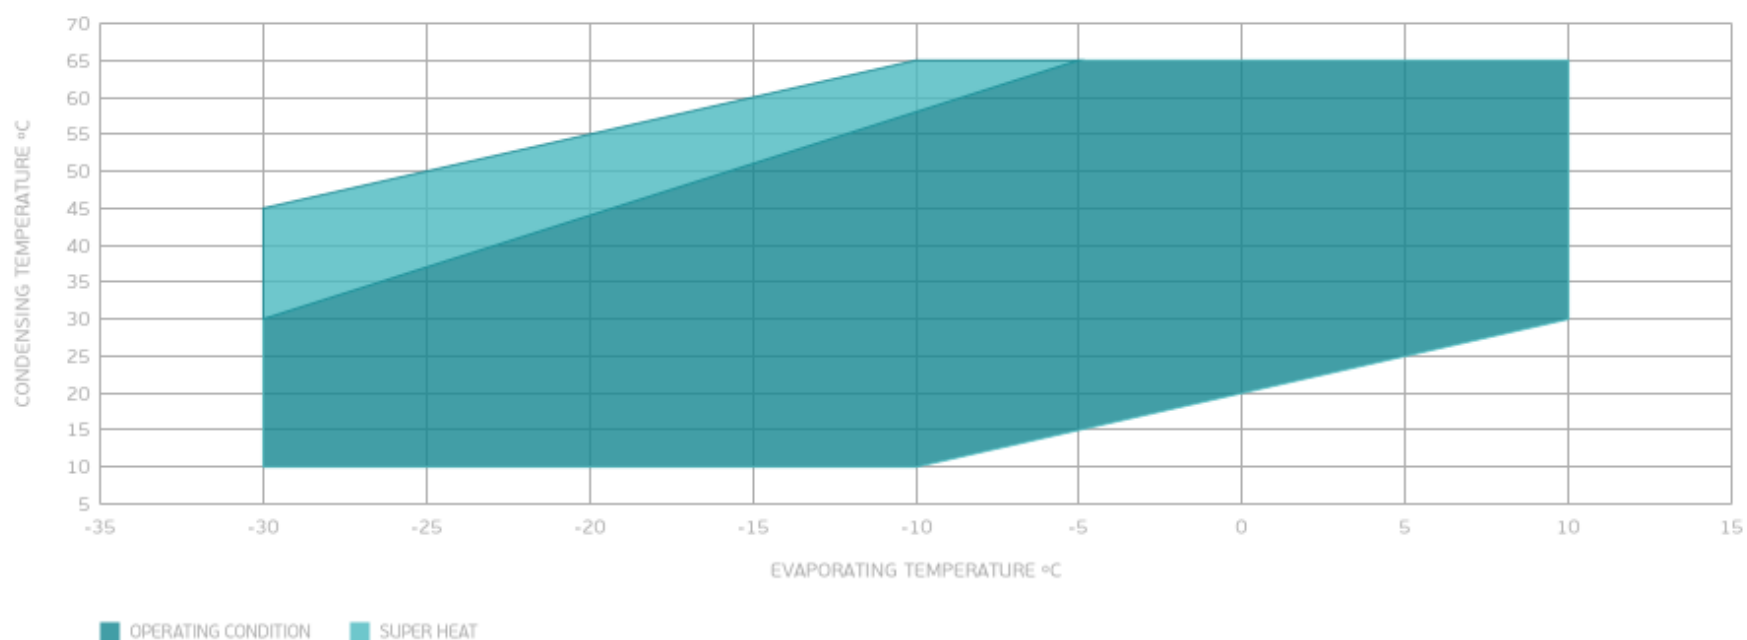

EXTERNAL DIMENSIONS

